

Log into T-Max dialer to input the settings for the collector so the T-Max Dialer can communicate with the Screen Pop Web Service.



Server
PD2 (23) ▼

Login
login name


Password
Password

I agree to the End User License Agreement
 Remember Password


All Rights Reserved. © Copyright 2008-17.
All Unauthorized Access is Prohibited.
Support: (620) 259-7892 | EMail: Support@TMaxDialer.com | Fax: (866) 861-1146
HOURS OF OPERATION: M-W 8am-6pm | TH 8am-5pm | F 8am-1pm
Compiled Wednesday Jul 19 2017 PM

Once you are logged in to T-Max Dialer you will need to click on the Admin tab. It is marked below.

TMAX Dialer Configuration

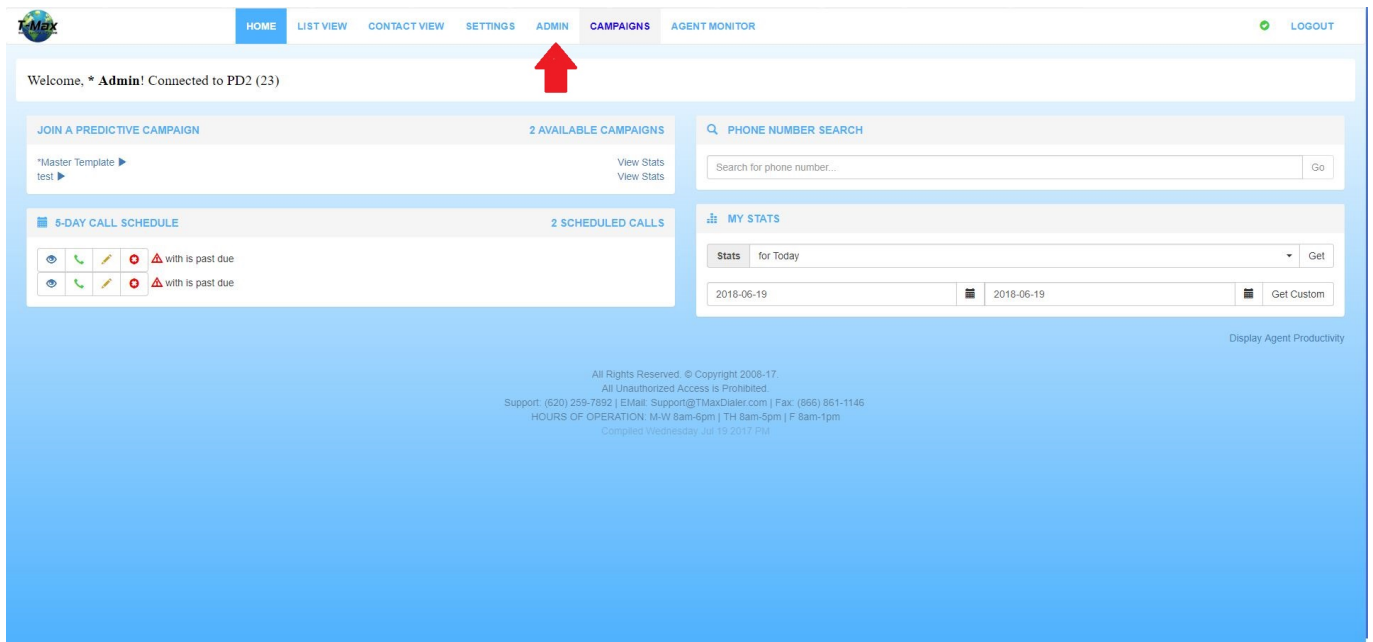

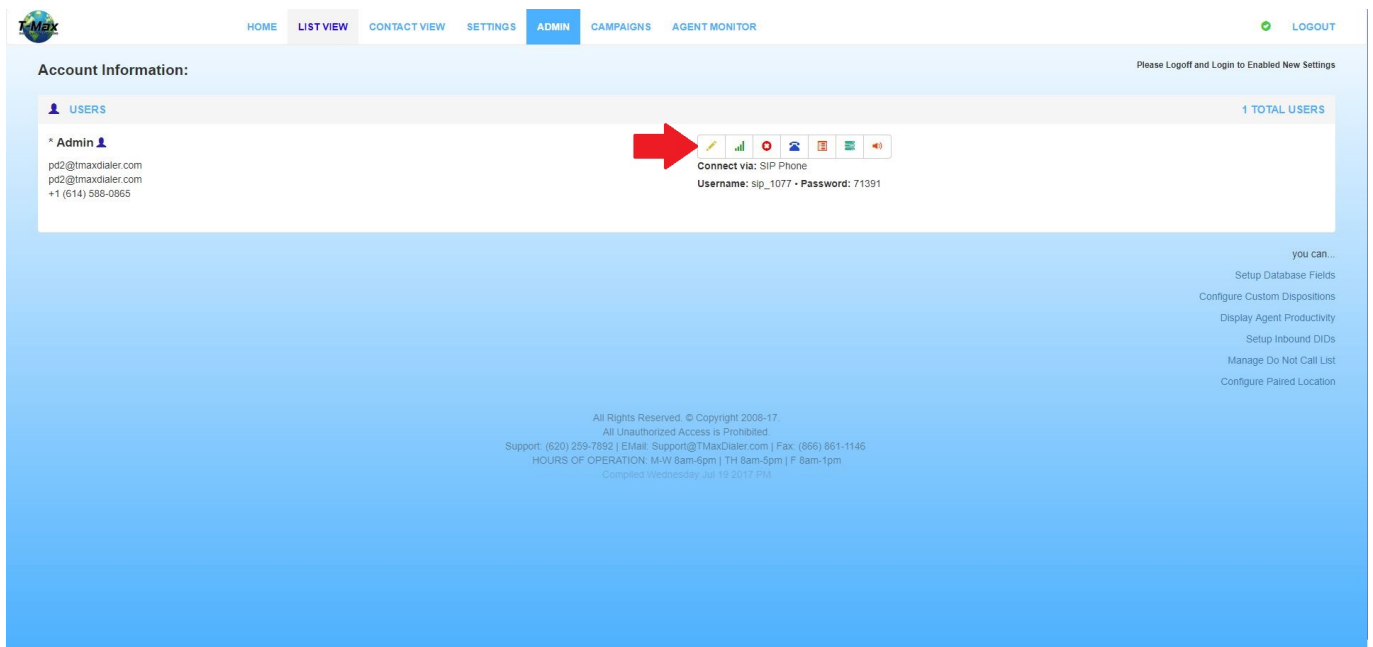

Now you want to open the collector you set up in Collections Max, and edit their properties. Click on the pencil icon to access the settings.



The following screen is where you will input the Screen Pop settings. The POST Url: Field is where you will post the following information.

Edit User: * Admin

User Data	Privileges	Tabs & Appearance
Name: *	<input type="text" value="* Admin"/>	
Login name: *	<input type="text" value="tech@tmaxdialer.com"/>	
Email: *	<input type="text" value="tech@tmaxdialer.com"/>	
Caller ID Name:	<input type="text" value="Joeseph W"/>	
	A-Z and a-z Characters Only	
Caller ID Number:	<input type="text" value="+1 (212) 555-1212"/>	
	Must Be A Valid Phone Number	
Password:	<input type="password"/>	
Password Again:	<input type="password"/>	
 POST Url:	<input type="text" value="http://screenpop.collectionsmax.com/insertpop.php?"/>	
Support Url:	<input type="text"/>	



In the Post Url box type in:

<http://screenpop.collectionsmax.com/insertpop.php?userid=XXXX&key=XXXXXXXXXXXX-XXXXXXXXXXXX-XXXXXXXXXXXX&accountid=# {Id}>

The user id code in RED is where you will input the 4 digit user ID you assigned to the collector in Collections Max. The key field marked in GREEN is where you will enter your Screen Pop Activation Key. Once you have this all filled out, click Save Properties.

The Screen Pop Service can now communicate with T-Max Dialer and Communications. Make sure the collector Logs off of the dialer and back on to enable the new settings.